

LAHDEN KESA 2024-1 JAKSO



Oil Pattern Distance Forward Oil Total Tank Configuration 40 11.115 mL Multi Tank Reverse Brush Drop Reverse Oil Total Tank A Conditioner

11.43 mL TERRAIN

34

Oil Per Board Volume Oil Total Tank B Conditioner 45 ul 22.545 mL ICE

	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	1	14	3	Α	37	0.0	0.0	0.0	1665
2	5L	7R	3	18	3	Α	87	0.0	7.6	7.6	3915
3	10L	10R	3	22	3	Α	63	7.6	16.9	9.3	2835
4	12L	12R	2	22	3	Α	34	16.9	23.1	6.2	1530
5	14L	14R	2	22	3	Α	26	23.1	29.3	6.2	1170
6	2L	2R	0	26	3	Α	0	29.3	40.0	10.7	0

	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	3	В	0	40.0	32.0	-8.0	0
2	14L	14R	2	22	3	В	26	32.0	25.8	-6.2	1170
3	12L	12R	2	22	3	В	34	25.8	19.6	-6.2	1530
4	6L	6R	3	18	3	Α	87	19.6	12.0	-7.6	3915
5	3L	3R	2	18	3	В	70	12.0	6.9	-5.1	3150
6	2L	2R	1	14	3	В	37	6.9	5.0	-1.9	1665
7	2L	2R	0	14	3	В	0	5.0	0.0	-5.0	0

Cleaner Ratio Main Mix 24:1 Forward
Cleaner Ratio Back End Mix 33:1 Reverse
Cleaner Ratio Back End Distance 50 Combined

8L-12L:18L-18R


13L-17L:18L-18R

Buffer RPM: 4 = 650 | 3 = 500 | 2 = 300 | 1 = 200

3L-7L:18L-18R

Item

2	5 5	20	15	9	2	
						55
						20
						45
						40
						35
						30
						52
						50
ı					ı	15
Γ						10
						5

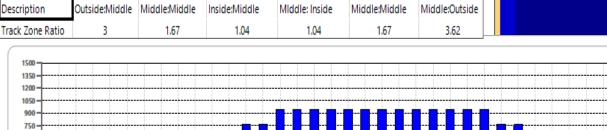

18L-18R:17R-13R

18L-18R:12R-8R

18L-18R:7R-3R