

## **LAHDEN KESA 2025- 2 JAKSO**



Oil Pattern Distance **Forward Oil Total Tank Configuration** 

43 14.08 mL Multi Tank

**Reverse Brush Drop Reverse Oil Total Tank A Conditioner** 

37 12.56 mL **TERRAIN**  Oil Per Board **Volume Oil Total Tank B Conditioner** 

40 ul 26.64 mL **ICE** 

2   11L   9R   4   14   3   A   84   5.9   13.8   7.9   3360     3   13L   11R   2   14   3   A   34   13.8   17.7   3.9   1360     4   13L   11R   2   18   3   A   34   17.7   22.8   5.1   1360     5   15L   13R   4   18   3   A   52   22.8   33.0   10.2   2080     6   2L   2R   0   22   3   A   0   33.0   38.0   5.0   0		START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
3 13L 11R 2 14 3 A 34 13.8 17.7 3.9 1360   4 13L 11R 2 18 3 A 34 17.7 22.8 5.1 1360   5 15L 13R 4 18 3 A 52 22.8 33.0 10.2 2080   6 2L 2R 0 22 3 A 0 33.0 38.0 5.0 0	1	2L	2R	4	14	3	Α	148	0.0	5.9	5.9	5920
4 13L 11R 2 18 3 A 34 17.7 22.8 5.1 1360   5 15L 13R 4 18 3 A 52 22.8 33.0 10.2 2080   6 2L 2R 0 22 3 A 0 33.0 38.0 5.0 0	2	11L	9R	4	14	3	Α	84	5.9	13.8	7.9	3360
5 15L 13R 4 18 3 A 52 22.8 33.0 10.2 2080 6 2L 2R 0 22 3 A 0 33.0 38.0 5.0 0	3	13L	11R	2	14	3	Α	34	13.8	17.7	3.9	1360
6 2L 2R 0 22 3 A 0 33.0 38.0 5.0 0	4	13L	11R	2	18	3	Α	34	17.7	22.8	5.1	1360
	5	15L	13R	4	18	3	Α	52	22.8	33.0	10.2	2080
	6	2L	2R	0	22	3	Α	0	33.0	38.0	5.0	0
7 2L 2R 0 26 3 A 0 38.0 43.0 5.0 0	7	2L	2R	0	26	3	Α	0	38.0	43.0	5.0	0

2   14L   12R   2   18   3   B   30   36.0   30.9   -5.1   1200     3   12L   10R   2   18   3   B   38   30.9   25.8   -5.1   1520     4   8L   8R   2   18   3   B   50   25.8   20.7   -5.1   2000     5   6L   7R   2   18   3   B   56   20.7   15.6   -5.1   2240     6   4L   6R   1   14   3   B   31   15.6   13.7   -1.9   1240     7   2L   4R   1   14   3   B   35   13.7   11.8   -1.9   1400     8   2L   2R   2   14   3   B   74   11.8   7.9   -3.9   2960		START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
3   12L   10R   2   18   3   B   38   30.9   25.8   -5.1   1520     4   8L   8R   2   18   3   B   50   25.8   20.7   -5.1   2000     5   6L   7R   2   18   3   B   56   20.7   15.6   -5.1   2240     6   4L   6R   1   14   3   B   31   15.6   13.7   -1.9   1240     7   2L   4R   1   14   3   B   35   13.7   11.8   -1.9   1400     8   2L   2R   2   14   3   B   74   11.8   7.9   -3.9   2960	1	2L	2R	0	30	3	В	0	43.0	36.0	-7.0	0
4 8L 8R 2 18 3 B 50 25.8 20.7 -5.1 2000 5 6L 7R 2 18 3 B 56 20.7 15.6 -5.1 2240 6 4L 6R 1 14 3 B 31 15.6 13.7 -1.9 1240 7 2L 4R 1 14 3 B 35 13.7 11.8 -1.9 1400 8 2L 2R 2 14 3 B 74 11.8 7.9 -3.9 2960	2	14L	12R	2	18	3	В	30	36.0	30.9	-5.1	1200
5 6L   7R   2   18   3   B   56   20.7   15.6   -5.1   2240     6 4L   6R   1   14   3   B   31   15.6   13.7   -1.9   1240     7 2L   4R   1   14   3   B   35   13.7   11.8   -1.9   1400     8 2L   2R   2   14   3   B   74   11.8   7.9   -3.9   2960	3	12L	10R	2	18	3	В	38	30.9	25.8	-5.1	1520
6 4L 6R 1 14 3 B 31 15.6 13.7 -1.9 1240 7 2L 4R 1 14 3 B 35 13.7 11.8 -1.9 1400 8 2L 2R 2 14 3 B 74 11.8 7.9 -3.9 2960	4	8L	8R	2	18	3	В	50	25.8	20.7	-5.1	2000
7 2L 4R 1 14 3 B 35 13.7 11.8 -1.9 1400 8 2L 2R 2 14 3 B 74 11.8 7.9 -3.9 2960	5	6L	7R	2	18	3	В	56	20.7	15.6	-5.1	2240
8 2L 2R 2 14 3 B 74 11.8 7.9 -3.9 2960	6	4L	6R	1	14	3	В	31	15.6	13.7	-1.9	1240
	7	2L	4R	1	14	3	В	35	13.7	11.8	-1.9	1400
9 2L 2R 0 14 3 B 0 7.9 0.0 -7.9 0	8	2L	2R	2	14	3	В	74	11.8	7.9	-3.9	2960
	9	2L	2R	0	14	3	В	0	7.9	0.0	-7.9	0

Cleaner Ratio Main Mix 24:1 Forward Cleaner Ratio Back End Mix 33:1 Reverse Cleaner Ratio Back End Distance 59 Combined

8L-12L:18L-18R

13L-17L:18L-18R

Inside:Middle

18L-18R:17R-13R

MIddle: Inside


Buffer RPM: 4 = 650 | 3 = 500 | 2 = 300 | 1 = 200


Outside:Middle Middle:Middle

3L-7L:18L-18R

Item

Description

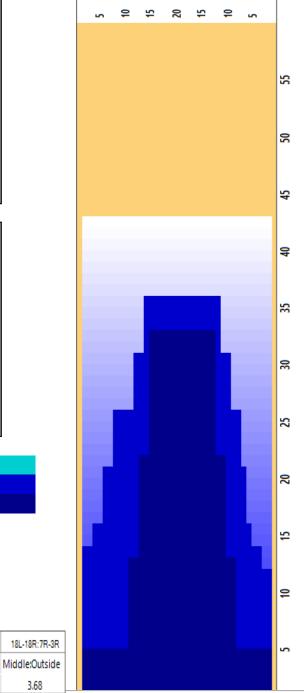

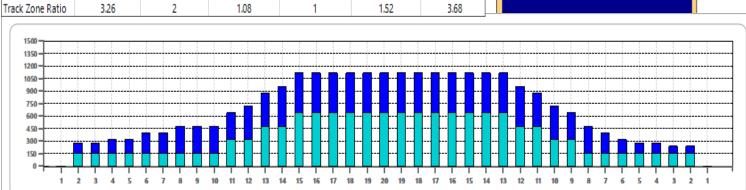

18L-18R:12R-8R

Middle:Middle

18L-18R:7R-3R