



VALTAKUNNANSARJAT SYYS-LOKA




Oil Pattern Distance	42	Reverse Brush Drop	35	Oil Per Board	40 ul
Forward Oil Total	14.76 mL	Reverse Oil Total	11.12 mL	Volume Oil Total	25.88 mL
Tank Configuration	Multi Tank	Tank A Conditioner	ICE	Tank B Conditioner	ICE

	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	3R	2	14	3	A	72	0.0	1.9	1.9	2880
2	3L	5R	3	18	3	A	99	1.9	9.5	7.6	3960
3	9L	9R	4	18	3	A	92	9.5	19.7	10.2	3680
4	11L	11R	4	18	3	A	76	19.7	29.9	10.2	3040
5	13L	13R	2	18	3	A	30	29.9	35.0	5.1	1200
6	2L	2R	0	26	3	A	0	35.0	42.0	7.0	0

	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	3	B	0	42.0	34.0	-8.0	0
2	14L	14R	3	22	3	B	39	34.0	24.7	-9.3	1560
3	10L	10R	4	18	3	B	84	24.7	14.5	-10.2	3360
4	6L	6R	3	18	3	B	87	14.5	6.9	-7.6	3480
5	3L	4R	2	14	3	B	68	6.9	3.0	-3.9	2720
6	2L	2R	0	14	3	B	0	3.0	0.0	-3.0	0

Cleaner Ratio Main Mix 24:1 Forward
Cleaner Ratio Back End Mix 33:1 Reverse
Cleaner Ratio Back End Distance 50 Combined
Buffer RPM: 4 = 650 | 3 = 500 | 2 = 300 | 1 = 200

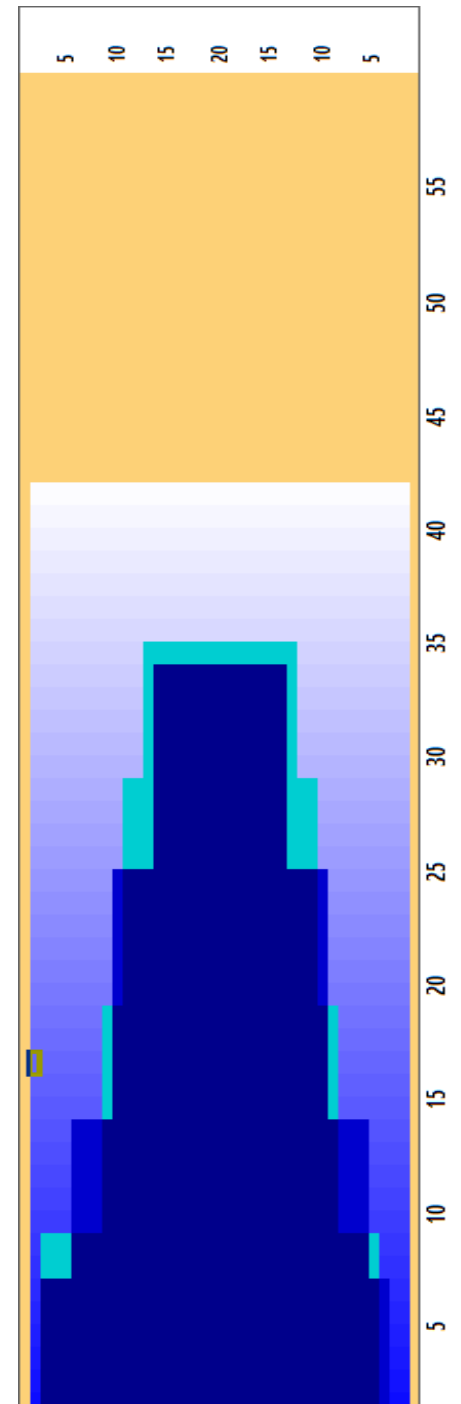

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside:Middle	Middle:Middle	Inside:Middle	Middle: Inside	Middle:Middle	Middle:Outside
Track Zone Ratio	3.29	1.57	1.02	1.02	1.57	4.09

